

ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY

Integration & Operation of a Microgrid at Santa Rita Jail

Nicholas DeForest, Judy Lai, Michael Stadler, Gonçalo Mendes, Chris Marnay & Jon Donadee

Environmental Energy Technologies Division

presented at the Jeju 2011 Symposium on Microgrids, Jeju Island, Korea, May 27 - 28, 2011

http://eetd.lbl.gov/EA/EMP/emp-pubs.html

The work described in this poster was funded by the Office of Electricity Delivery and Energy Reliability's Smart Grids Program in the U.S. Department of Energy under Contract No. DE-AC02-05CH11231.

Disclaimer

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor The Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or The Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof, or The Regents of the University of California.

Ernest Orlando Lawrence Berkeley National Laboratory is an equal opportunity employer.

Integration & Operation of a Microgrid at Santa Rita Jail

Team: Nicholas DeForest, Judy Lai, Michael Stadler, Gonçalo Mendes, Chris Marnay & Jon Donadee Project Partners: Lawrence Berkeley National Laboratory, Chevron Energy Solutions & Alameda County








Introduction

Santa Rita Jail is a 4,500 inmate facility located in Dublin CA, approximately 40 miles (65 km) east of San Francisco. Over the past decade, a series of Distributed Energy Resources (DER) installations and efficiency measures have been undertaken to transform the 3MW facility into a "Green Jail", These include a 1.2MW rated rooftop PV system installed in 2002, a 1MW molten carbonate fuel cell with CHP, and retrofits to lighting and HVAC systems to reduce peak loads. With the upcoming installation of a large-scale battery and fast static disconnect switch, Santa Rita Jail will become a true microgrid, with full CERTS Microgrid functionality. Consequently, the jail will be able to seamlessly disconnect from the grid and operate as an island in the event of a disturbance, reconnecting again once the disturbance has dissipated. The extent to which that jail is capable of islanding is principally dependant on the energy capacity of the battery—one focus of this investigation. Also presented here are overviews of the DER currently installed at the jail, as well as the value it provides by offsetting the purchase of electricity under the current Pacific Gas & Electric (PG&E) tariff.

Tariff Structure

Santa Rita Jail currently purchases its electricity under PG&E's E-20 tariff. The tariff (Table 1) employs time of use (TOU) charges for energy and power demand. TOU rates vary both by month, with "summer" and "winter" periods, as well as hour of the day, with "off-peak", "part-peak" and "max-peak" periods. There is an additional charge for the maximum monthly power demand. Given the time sensitivity of the E-20 tariff, there is strong incentive to push electricity purchases off-peak. (see Optimization & Scheduling) 2009 monthly electricity bills are given in Figure 1, by power and energy charges.






Santa Rita Jail

- Microgrid/Macrogrid Connection

sometimes requiring the fuel cell to the port. Office on, the fuel cell requires several notice to ramp back up to full output. While short, these outages have a potentially significant economic impact by setting monthly power demand charges. Outages are also suspected to have a detrimental effect on the life of the fuel cell stack. By installing a fast static disconnect switch and battery, these issues can be avoided in the future, while also improving reliability at the jail, by way of CERTS Microgrid functionality.

2 - PV System

Rated at 1.2MW, the roof-mounted PV system at Santa Rita Jail has a historic peak generation of only about **700kW**. Of the four PV arrays present at the jail, one has deteriorated significantly, contributing to the performance, the value of PV is evident in **Figure 2**. Because PV output effectively offsets some purchases of electricity at

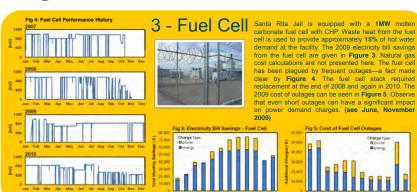

4 - Battery

The installation of a large-scale battery at Santa Rita Jail provides added reliability, plus the potential to shift electricity purchase to less expensive off-peak times. The specifications of the battery will determine the extent to which it can accomplish these tasks. The jail has considered two battery technologies recently, and while this decision is not based entirely on economics, such a comparison has been conducted here to demonstrate how well each fit this specific microgrid application. Assumptions for battery specifications are outlined in **Table 2**.

Table 2: Battery Specifications

Technology		Sodium-Sulfur	Li-Iron Phosphate
Energy Capacity	[kWh]	12,000	4,000
Power	[kW]	2,000	2,000
Roundtrip Efficiency	[-]	0.77	0.83
Decay	[%/hr]	0.002	0.005
Min. SOC	[-]	0.2	0.2

The battery is the only truly dispatchable DER at the jail. Utilizing LBNL's Distributed Energy Resources Customer Adoption Model (DER-CAM) optimal battery scheduling is determined for several scenario-weeks. This has been conducted for an operational fuel cell (Scenario 1) and, more realistically, a short fuel cell outage (Scenario 2). The savings as a result of the battery are also tabulated (Table 3).

The higher capacity of Battery A allows it to reduce max-peak power demand charges more than Battery B. A is also capable of islanding for longer durations than B, which is of value to microgrid applications. Despite its lower capacity, B still captures a significant portion of potential demand charge savings. B can allow for short periods of islanding. Its installation should also help mitigate disturbance-related fuel cell outages.

Table 3: Results of DER-CAM Weekly Operations Optimization

Savings from Storage					
Battery		ttery	A	В	
Scenario 5	energy	\$626	\$459		
	power	\$12,586	\$9,560		
S 2	energy	\$747	\$570		
		power	\$21,244	\$11,363	

Note: Power savings assume that monthly demand charges are set during the week

The work described in this poster was funded by the Office of Electricity Delivery and Energy Reliability's Smart Grids Program in the U.S. Department of Energy under Contract No. DE-A002-05CH11231.

Poster designed by Lawrence Berkeley National Laboratory, © May 2011, der.lbl.gov Contacts: Cris Marnay chrismarnay@lbl.gov, Nicholas DeForest ndeforest@lbl.gov

